




BEARING USA CORP.

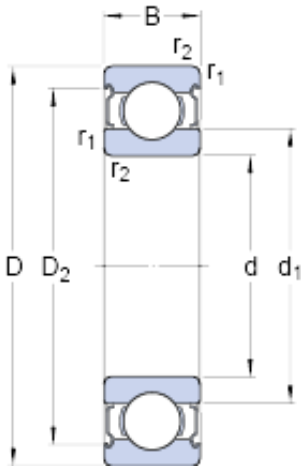

12 mm x 32 mm x 10 mm SKF 6201-2Z/VA201
deep groove ball bearings

Bearing No. 6201-2Z/VA201

6201-2Z/VA201 Bearing 2D drawings and 3D CAD models

Size	32x12x10 mm
Bore Diameter	32 mm
Outer Diameter	12 mm
Width	10 mm
d	12 mm
D	32 mm
B	10 mm
d ₁	18.45 mm
D ₂	27.34 mm
r _{1,2} - min.	0.6 mm
d _a - min.	16.2 mm
d _a - max.	18.4 mm
D _a - max.	27.8 mm
r _a - max.	0.6 mm
Basic dynamic load rating - C	7.3 kN
Basic static load rating - C ₀	3.1 kN
Limiting speed	200 r/min
Limiting temperature - T	250 ° C
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.049
EAN	7316570088083



BEARING USA CORP.

Product Group	B00308
Enclosure	2 Metal Shields
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	Polyalkylene Glycol/Graphite Mixture Filled
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	12MM Bore; 32MM Outside Diameter; 10MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; Polyalkylene Glycol/Graphite Mixture Filled Internal Special Fea
Other Features	Deep Groove Extreme Temperature Variant
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.skf.com
Weight / LBS	0.039
Bore	0.472 Inch 12 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.394 Inch 10 Millimeter
Outside Diameter	1.26 Inch 32 Millimeter
d ₁	18.45 mm
D ₂	27.34 mm



BEARING USA CORP.

$r_{1,2}$ min.	0.6 mm
d_a min.	16.2 mm
d_a max.	18.4 mm
D_a max.	27.8 mm
r_a max.	0.6 mm
Basic dynamic load rating C	7.28 kN
Basic static load rating C_0	3.1 kN
Limiting temperature T max.	250 ° C
Mass bearing	0.039 kg