




BEARING USA CORP.

35 mm x 100 mm x 25 mm SKF 7407 BCBM angular contact ball bearings

Bearing No. 7407 BCBM

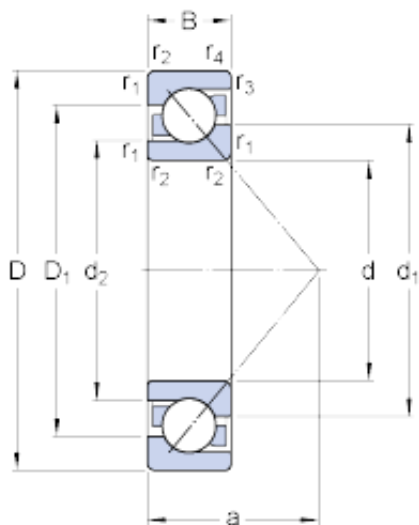

7407 BCBM Bearing 2D drawings and 3D CAD models

Size	100x35x25 mm
Bore Diameter	100 mm
Outer Diameter	35 mm
Width	25 mm
d	35 mm
D	100 mm
B	25 mm
d ₁	61.95 mm
d ₂	50.75 mm
D ₁	76.1 mm
a	41 mm
r _{1,2} - min.	1.5 mm
r _{3,4} - min.	1.5 mm
d _a - min.	55 mm
D _a - max.	110 mm
D _b - max.	89.4 mm
r _a - max.	2 mm
r _b - max.	2 mm
Basic dynamic load rating - C	60.5 kN
Basic static load rating - C ₀	38 kN
Fatigue load limit - P _u	1.6 kN
Reference speed	8500 r/min
Limiting speed	9000 r/min
Calculation factor - k _r	0.1



BEARING USA CORP.

Calculation factor - k_a	1.6
Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - Y_0	0.52
Calculation factor - Y_1	0.55
Calculation factor - Y_2	0.93
Calculation factor - X	0.35
Calculation factor - Y_0	0.26
Calculation factor - Y_1	
Calculation factor - Y_2	0.57
Category	Angular Contact Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	1
EAN	7316576651236
Product Group	B00308
Enclosure	Open
Flush Ground	Yes
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3 ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Brass
Contact Angle	40 Degree
Internal Clearance	CB
Number of Bearings	1 (Single)
Mounting Arrangement	Universal
Inch - Metric	Metric



BEARING USA CORP.

Long Description	35MM Bore; 100MM Outside Diameter; 25MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3 ISO P6; No Filling Slot; No Snap Ring
Other Features	Normal Axial Internal Clearance
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	7407 BCBM
Weight / LBS	2.205
Bore	1.378 Inch 35 Millimeter
Width	0.984 Inch 25 Millimeter
Outside Diameter	3.937 Inch 100 Millimeter
bore diameter:	35 mm
radial static load capacity:	38 kN
outside diameter:	100 mm
cage material:	Brass
overall width:	25 mm
outer ring width:	25 mm
contact angle:	40 °
maximum rpm:	9000 RPM
row type & fill slot:	Single-Row Non-Fill Slot
finish/coating:	Uncoated
internal clearance:	C0
precision rating:	ABEC 3 (ISO Class 6)
closure type:	Open
fillet radius:	1.5 mm



BEARING USA CORP.

radial dynamic load capacity:	60.5 kN
series:	74
d_1	61.95 mm
d_2	50.75 mm
D_1	76.1 mm
$r_{1,2}$ min.	1.5 mm
$r_{3,4}$ min.	1.5 mm
d_a min.	55 mm
D_a max.	110 mm
D_b max.	89.4 mm
r_a max.	2 mm
r_b max.	2 mm
Basic dynamic load rating C	60.5 kN
Basic static load rating C_0	38 kN
Fatigue load limit P_u	1.6 kN
Calculation factor A	0.0276
Calculation factor k_r	0.1
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor Y_0	0.26
Calculation factor Y_2	0.57
Calculation factor X	0.57
Calculation factor Y_0	0.52
Calculation factor Y_1	0.55
Calculation factor Y_2	0.93
Mass bearing	1.1 kg