




BEARING USA CORP.

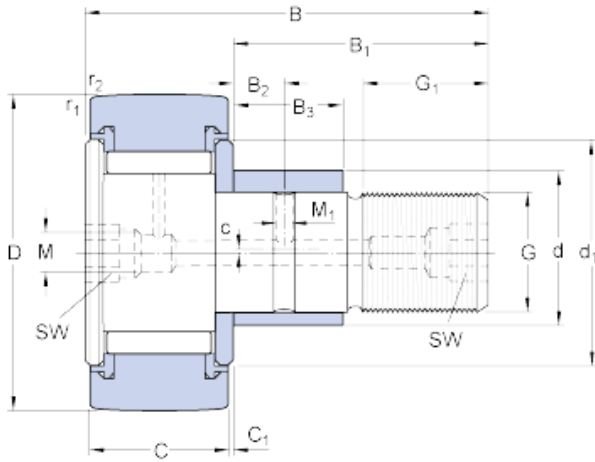

28 mm x 62 mm x 80 mm SKF KRVE 62 PPA
cylindrical roller bearings

Bearing No. KRVE 62 PPA

KRVE 62 PPA Bearing 2D drawings and 3D CAD models

Size	28x62x80 mm
Bore Diameter	28 mm
Outer Diameter	62 mm
Width	80 mm
D	62 mm
d	28 mm
B	80 mm
C	29 mm
B ₁	49.5 mm
B ₂	11 mm
B ₃	22 mm
C ₁	0.8 mm
d ₁	44 mm
G	M 24x1.5
G ₁	25 mm
M	8 mm
M ₁	4 mm
SW	14 mm
c	1 mm
r _{1,2} - min.	1 mm
Basic dynamic load rating - C	31.4 kN
Basic static load rating - C ₀	72 kN
Fatigue load limit - P _u	9 kN



BEARING USA CORP.

Maximum dynamic radial loads - F_r	72 kN
Maximum static radial loads - F_{0r}	102 kN
Limiting speed	1700 r/min
Mass support roller	0.815 kg
Recommended tightening torque	220 N · m
Grease fitting	NIP A3x9.5
Hexagonal nut	M 24x1.5
Category	Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
UNSPSC	31171530
Weight / Kilogram	0.911
EAN	7316571620718
Product Group	B04144
B_1	49.5 mm
B_2	11 mm
B_3	22 mm
C_1	0.8 mm
d_1	44 mm
G_1	25 mm
M_1	4 mm
$r_{1,2}$ min.	1 mm
Basic dynamic load rating C	31.4 kN
Basic static load rating C_0	72 kN
Fatigue load limit P_u	9 kN
Maximum dynamic radial loads F_r max.	72 kN
Maximum static radial loads F_{0r} max.	102 kN



BEARING USA CORP.

Mass cam follower	0.81 kg
Lubrication adapter	AP 14